
Pump Size: 2 x 2-1/2 x 6 M

Model: B2T_M


Nomial RPM: 24 Based on Fresh Water @ 68° F(2)° Maximum Working Pressure:150 PSI (10 BA 00 0 06 6.00° Dia. (Full) 07 74 08 74 09 74 09 75 09 75 09 75 09 75 09 75 09 <th>Туре</th> <th>CCMD</th> <th>FM CPLG</th> <th>FM BELT</th> <th>SAE</th> <th>Hydraulic</th> <th>AC Engine</th>	Туре	CCMD	FM CPLG	FM BELT	SAE	Hydraulic	AC Engine
Based on Fresh Water @ 68°F (20° Maximum Working Pressure: 150 PSI (10 BA	Model	B2TPM					B2TQMS-13.5 (6.10" Diameter Impeller
50 50 50 50 50 50 50 50 50 50						d on Fresh Wat	er 10 68°F (20°C
50 50 10 10 10 10 10 10 10 10 10 1	50 - 200						
500 6.188° Dia. (10 HP) 6.188° Dia. (10 HP) 6.5625° Dia. (7.5 HP) 6.5625° Dia. (7.5 HP) 7.5 hP) 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0	180-	_6.500" Dia. (Full)	54	0/			
140 5.625" Dia. (7.5 HP) 100 5.625" Dia. (7.5 HP) 5.000" Dia. (5 HP) 4.250" Dia. (3 HP) 4.250" Dia. (3 HP) 4.250" Dia. (3 HP) 4.250" Dia. (3 HP) 5.000" Dia. (4 HP) 5.000" Dia. (5 HP) 5.000" Dia.	160-	_6.188" Dia. (10 HP			\prec		
120 120 5.000" Dia. (5 HP) 4.250" Dia. (3 HP) 5.0 hp (3.7 kW) 3.0 hp (2.2 kW) 40 5.0 hp (3.7 kW) 5.0 hp (3.7 k					X		73
0 4.250° Dia. (3 HP) 2.0 hp (1.5 kW) 61 0 4.250° Dia. (3 HP) 2.0 hp (1.5 kW) 5.0 hp (3.7 kW) 0 0 5.0 hp (3.7 kW) 0 0 0 0 0 0 0 0 0 0 10 120 140 160 180 200 240 260 280 300 320		-5.625" Dia. (7.5 HI		$\langle \rangle$			70
20 4.250° Dia. (3 HP) 4.250° Dia. (3 HP) 4.	Head - ft	5.000" Dia. (5 HP)	\times				10 hp (7.5 kW)
20 60 60 60 60 60 60 60 60 60 6	80-	4.250" Dia. (3 HP)	A/N				61
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$							
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				\times	3.0 hp (2.2 kW)	5.0 hp (3.7 k	W)
0 20 40 60 80 100 120 140 160 180 200 220 240 260 280 300 320							
		0 20 40	60 80 100	120 140 160	180 200	220 240 26	0 280 300 320
Capacity - USgpm		ı		Capacity -	USgpm I I		

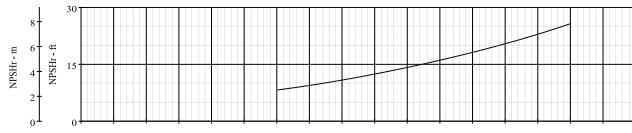

Pump Size: 2 x 2-1/2 x 6 M

Model: B2T_M

Curve No. 8578

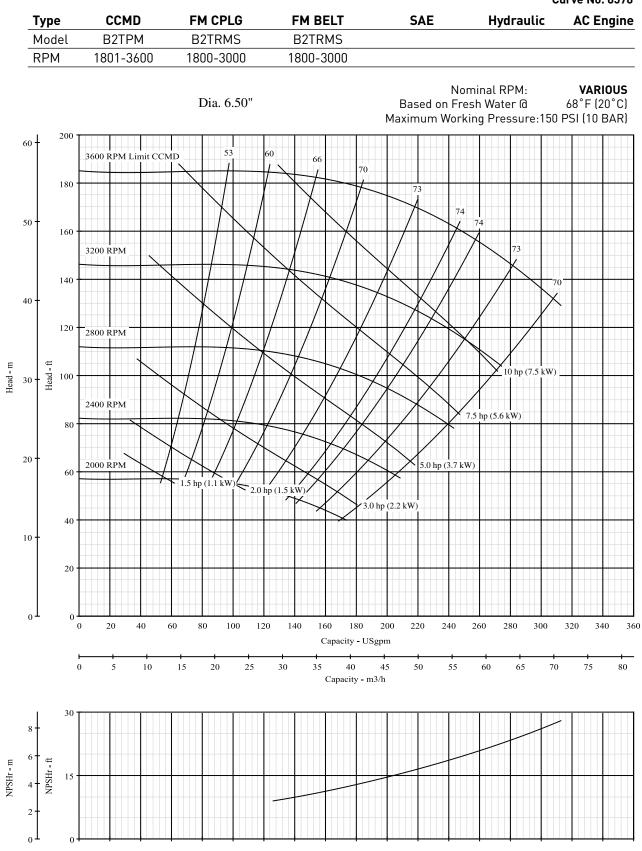

^{*}NPSH data shown is at maximum speed