



**SR 300**  
32-90

**1.26" x 296ft**  
Sime Funny Sprinkler  
5-10 GPM

The Micro Series Irrigation Travelers from Watertec are ideally suited for sports fields, landscape areas, horse arenas, polo fields, hobby farms, nurseries, feed plots, vegetable farms, and small acreage farms requiring irrigation at an affordable cost.

Watertec Micro Series systems make portable irrigation a simple matter, requiring less labor than conventional portable systems, while being an excellent low cost alternative to in-ground installations. Micros operate unattended and are fitted with automatic shut-off valve and automatic cart loading as a standard feature.

The simple turbine drive system eliminates the need for pulleys, belts, sprockets and chains, keeping maintenance to a minimum and utilizing all the water – no wasteful dumping onto the ground.



## FEATURES:

- Low Pressure Turbine with maintenance free gearbox.
- Minimum Pressure requirement of 35 PSI (Max 110)
- Automatic drive and water shut off valve.
- Adjustable width wheeled cart.
- Part circle sprinkler with 2 nozzles.
- Glycerin filled pressure gauge.
- Scroll type hose-guide for even wind up of hose.
- Speed control valve for accurate application rates.
- Extra wide floatation tires.
- 12 foot supply hose with quick couplers.
- Automatic cart loading and lifting.
- Lockable drive system cover.

**WaterTec**

[www.watertecna.com](http://www.watertecna.com)



1-877-591-4790





1-888-695-7999



# SR 300

32-90

**1.26" x 296ft**  
 Sime Funny Sprinkler  
 5-10 GPM

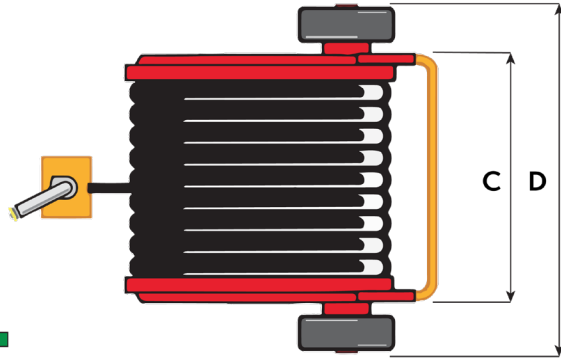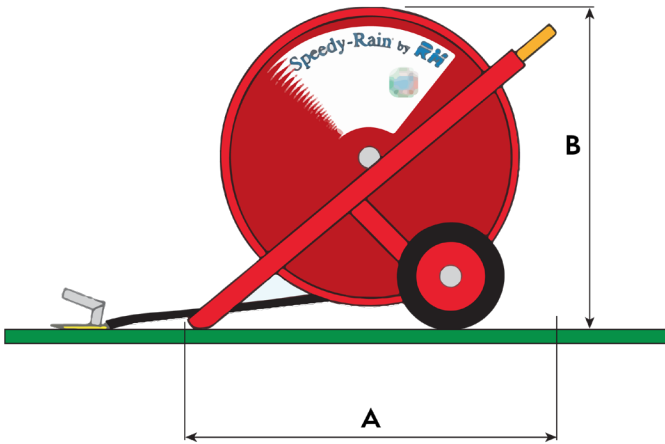

<b>A</b>	37.8"
<b>B</b>	31.5"
<b>C</b>	26.8"
<b>D</b>	30.7"



**DOWNLOADS:**  
[Operation Manual](#)  
[Machine Parts Breakdown](#)

Nozzle Size	Inlet	Sprinkler	Flow	Range	Spacing (85%)	Speed (feet/hour)					
						33	49	65	82	98	131
						Rewind Time (hours)					
						9	6	4.5	3.6	3.0	2.3
mm/in	PSI	PSI	GPM	Feet	Feet	Precipitation rate in inches					
<b>6</b> 0.23"	29	22	7.4	85.3	72.5	0.29	0.20	0.14	0.11	0.09	0.07
	39	29	8.4	95.1	81.0	0.30	0.20	0.15	0.12	0.10	0.07
	74	58	11.8	114.8	97.7	0.35	0.24	0.17	0.14	0.11	0.09
<b>7</b> 0.27"	35	22	9.8	91.8	78.0	0.36	0.24	0.18	0.14	0.12	0.09
	45	29	11.0	98.4	83.6	0.38	0.25	0.19	0.15	0.12	0.09
	88	58	15.8	121.3	103.3	0.44	0.29	0.22	0.18	0.14	0.11