

SR 505 50-160

2" x 558ft Sime Ambo Sprinkler 25-80 GPM

The Micro Series Irrigation Travelers from Watertec are ideally suited for sports fields, landscape areas, horse arenas, polo fields, hobby farms, nurseries, feed plots, vegetable farms, and small acreage farms requiring irrigation at an affordable cost.

Watertec Micro Series systems make portable irrigation a simple matter, requiring less labor than conventional portable systems, while being an excellent low cost alternative to in-ground installations. Micros operate unattended and are fitted with automatic shut-off valve and automatic cart loading as a standard

The simple turbine drive system eliminates the need for pulleys, belts, sprockets and chains, keeping maintenance to a minimum and utilizing all the water - no wasteful dumping onto the ground.





FEATURES:

- Low Pressure Turbine with maintenance free gearbox.
- Minimum Pressure requirement of 73 PSI (Max 134)
- Automatic drive and water shut off valve.
- Adjustable width wheeled cart.
- Part circle sprinkler with 2 nozzles.
- Glycerin filled pressure gauge.
- Scroll type hose-guide for even wind up of hose.
- Speed control valve for accurate application rates.
- Extra wide floatation tires.
- 12 foot supply hose with quick couplers.
- Automatic cart loading and lifting.
- Rotating third wheel.
- Lockable drive system cover.

WaterTec


www.watertecna.com





SR 505 50-160

2" x 558ft Sime Ambo Sprinkler 25-80 GPM

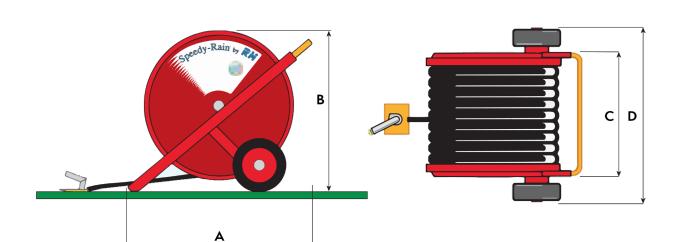

A	68.5"		
В	52"		
С	47"		
D	52"		



DOWNLOADS:

Operation Manual Machine Parts Breakdown Turbine Parts Breakdown

Nozzle Size	Inlet Sprinkler			(%)	Speed (feet/hour)							
		rinkler	N.	Radius	Spacing (85%)	62	93	124	155	186	243	
						Rewind Time (hours)						
		Flow	Ra	Spi	9	6	4.5	3.6	3	2.3		
mm/in	PSI	PSI	GPM	Feet	Feet	Precipitation rate in inches						
10 0.39"	43.5	29	23.3	118.1	100.4	0.68	0.45	0.34	0.27	0.23	0.17	
	60.9	43.5	28.2	134.5	114.5	0.72	0.48	0.36	0.29	0.24	0.18	
	78.3	58	32.8	144.4	122.7	0.78	0.52	0.39	0.31	0.26	0.20	
12 0.47"	49.3	29	33.6	124.6	106	0.93	0.62	0.46	0.37	0.31	0.23	
	69.6	43.5	40.9	137.8	117.1	1.03	0.68	0.51	0.41	0.34	0.25	
	89.9	58	47.2	154.2	131.2	1.06	0.7	0.53	0.43	0.35	0.26	