



**990 GX**  
125-550

**4.92" x 1804ft**  
Komet Twin 160 Ultra  
220-410 GPM

## FEATURES:

- Hydraulic Turntable
- Double Drive System
- 4 Wheel Chassis
- Flow-distributor hydraulic turbine with built-in by-pass
- 4-speed gearbox
- PTO for fast hose rewinding
- Braking system to unwind the hose with fully automatic operation
- Automatic speed compensator
- Self-balancing hydraulically controlled rear anchoring brackets, and hydraulic lift of trolley
- Adjustable trolley track and wheel height
- Komet Twin 160 Ultra sprinkler
- Hot-dip galvanized structure
- Water inlet on both sides



Comes Equipped with  
**Nortoft Program Rain**  
Computer System

### DOWNLOADS:

[Operation Manual](#)  
[Parts Breakdown](#)

# WaterTec

[www.watertecna.com](http://www.watertecna.com)



1-877-591-4790



1-888-695-7999






# 990 GX

## 125-550

**4.92" x 1804ft**  
 Komet Twin 160 Ultra  
 220-410 GPM

**Lbs**  
 13,889

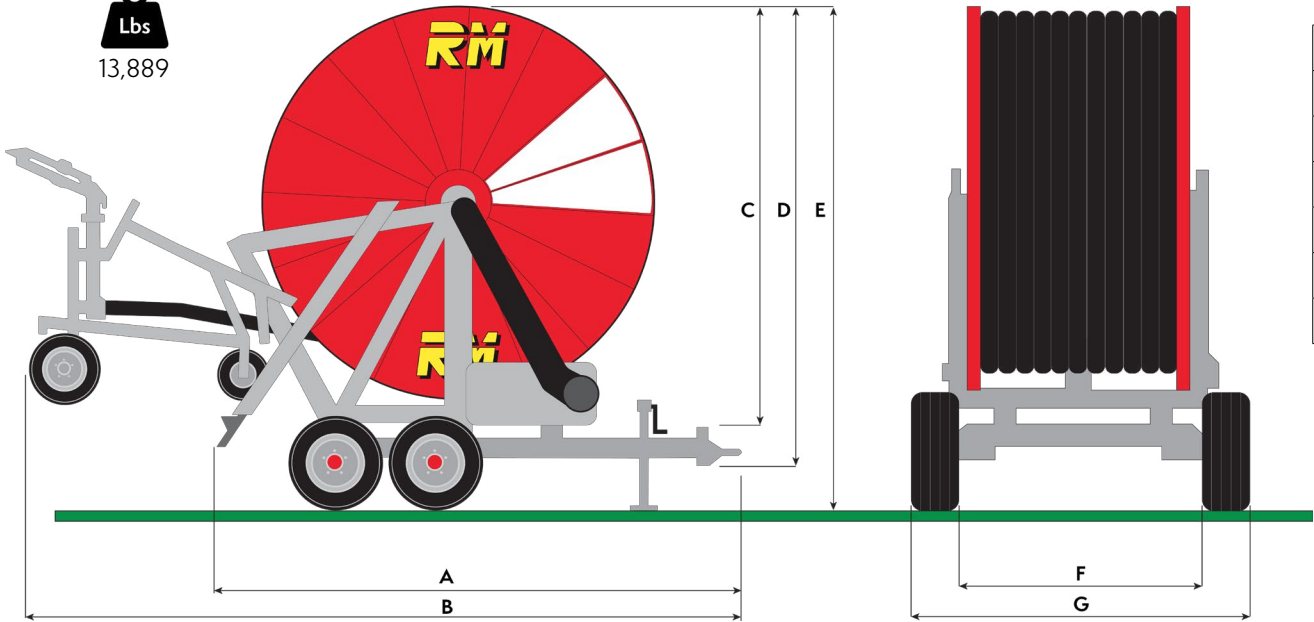

A	14.4'
B	23.6'
C	11.3'
D	12.1'
E	14.2'
F	8.1'
G	8.4'

Nozzle Size	Inlet	Sprinkler	Flow	Radius	Diameter	Spacing (85%)	Speed (feet/hour)												
							16	33	49	66	82	98	131	164	197	230	262	295	328
							Rewind Time (hours)												
							100	50	33.3	25	20	16.7	12.5	10	8.3	7.1	6.3	5.6	5
mm/in	PSI	PSI	GPM	Feet	Feet	Feet	Precipitation rate in inches												
26 1.02"	87	59	223	151	302	257	5.11	2.56	1.70	1.28	1.02	0.85	0.64	0.51	0.43	0.37	0.32	0.28	0.26
	106	74	250	167	335	284	5.15	2.58	1.72	1.29	1.03	0.86	0.65	0.52	0.43	0.37	0.32	0.29	0.26
	128	88	285	171	341	290	5.77	2.89	1.93	1.44	1.15	0.96	0.72	0.58	0.48	0.41	0.36	0.32	0.29
28 1.10"	94	59	259	157	315	268	5.68	2.84	1.89	1.42	1.14	0.94	0.71	0.57	0.47	0.41	0.35	0.31	0.28
	115	74	289	171	341	290	5.86	2.93	0.77	1.46	1.17	0.98	0.73	0.59	0.49	0.42	0.37	0.33	0.29
	135	88	317	180	361	307	6.07	3.04	2.02	1.52	1.22	1.01	0.76	0.61	0.51	0.43	0.38	0.34	0.30
30 1.18"	101	59	298	164	328	279	6.26	3.13	2.09	1.57	1.25	1.04	0.78	0.63	0.52	0.45	0.39	0.35	0.31
	123	74	333	167	354	301	6.48	3.24	2.16	1.62	1.30	1.08	0.81	0.65	0.54	0.46	0.41	0.36	0.32
	150	88	380	190	381	324	6.90	3.45	2.30	1.72	1.38	1.15	0.86	0.69	0.57	0.49	0.43	0.38	0.35
32 1.26"	110	59	338	171	341	290	6.85	3.43	2.28	1.71	1.37	1.14	0.86	0.69	0.57	0.49	0.43	0.38	0.34
	135	74	378	184	367	312	7.11	3.56	2.37	1.78	1.42	1.19	0.89	0.71	0.59	0.51	0.44	0.39	0.35
	160	88	414	194	387	329	7.39	3.70	2.46	1.85	1.48	1.23	0.93	0.74	0.62	0.53	0.46	0.41	0.37

