

Maximum recommended horsepower

# 190 HP

	Total width
	Working width
	Side shift
	Min. recommended horsepower
	Machine weight
	Number of blades

T190						
	in	in	in-in	HP	lbs	Nr.
<b>230</b>	101	93	46 - 46	100	2335	54
<b>255</b>	111	102	51 - 51	120	2470	60
<b>280</b>	121	112	56 - 56	140	2600	66
<b>305</b>	131	122	61 - 61	160	2735	72



www.celll-usa.com  
Toll Free: 1-877-591-4790

# TIGER 190

T190F									
	in	in	HP	lbs	lbs	lbs	lbs	Nr.	Nr.
<b>230</b>	101	93	100	2755	2755	3110	2930	45	72
<b>255</b>	111	102	120	2955	2955	3150	3130	50	80
<b>280</b>	121	112	140	3150	3150	3550	3330	55	88
<b>305</b>	131	122	160	3350	3350	3770	3530	60	96

	Machine weight with cage roller
	Machine weight with spikes roller
	Machine weight with packer roller
	Machine weight with spiral roller
	Number of spikes for frangor models
	Number of tines for frangor models

## ROTARY TILLERS and FRANGOR

### PIONEER 140

#### FRESA (P140)


Rotary tillers with "C" or "L" type blade rotor and side skids

#### FRANGOR (P140F)

With rear roller and spike or straight tine rotor

**ALSO AVAILABLE IN  
REVERSIBLE ROTARY  
TILLER VERSION**



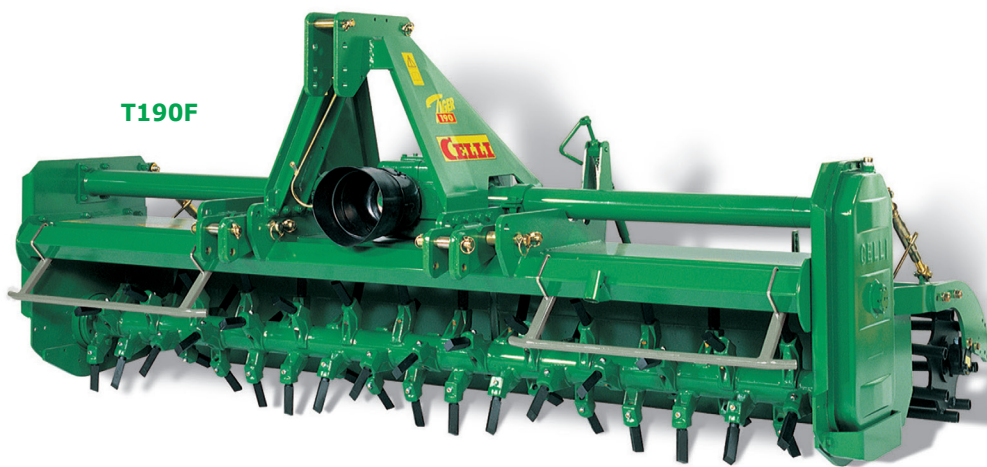

T190F



www.celli-usa.com  
Toll Free: 1-877-591-4790

# TIGER 190

## ROTARY TILLER suitable for high power tractors

### FRANGOR

The Frangor version is recommended for seedbed preparation when thorough soil refinement is required. It is different from the rotator tiller version due to the following modifications:

- rotor shaft fitter with either spikes or straight tines for accurate soil finishing. The rotor shaft rotates faster than the rotary tiller
- rear swinging articulated tailgate that offers a wide range of adjustment positions
- rear levelling roller (available in cage, spikes and packer models)

### TECHNICAL SPECIFICATIONS

- Maximum horsepower 190 HP
- PTO 2-speed gearbox for 1000 rpm
- Gear side transmission
- 3 point hitch cat. 2 and cat. 3
- Swinging front linkages
- Rear tailgate, adjustable with threaded bar
- L-shaped blades: 3.15"x4" (6 blades each flange, side blades leaning inwards) (T190)
- Cage roller, 17.3" adjustable with threaded bar (T190F)
- Working depth: 1" (T190): 0.8" (T190F)
- Side skids (T190)
- Tool stand (T190)
- Drive shaft with clutch
- Removable safety devices

### ACCESSORIES


- 2-speed gearbox for 1000 rpm with rear PTO
- 4-speed gearbox for 540 rpm PTO (T190)
- 2-speed gearbox for 540 rpm PTO (T190F)
- Oil cooling kit with radiator
- C-shaped blades
- Side blades leaning outwards
- C-shaped blades or L-shaped blades 0.4" thick
- Double flange rotor with 0.4" thick blades
- Rotor with quick blade (0.4") release system
- Straight tines rotor
- Set of 2 front wheels
- Pair or rear rubber/steel wheels fitted with arms and reinforcement cross bar
- Rear rollers
- Side skids (T190F)
- Rear rollers (Y190F)
- Counterplates
- Front track eraser
- Front sod breaking discs
- Hydraulic kit for roller adjustment
- Hydraulic kit for tailgate adjustment
- Rear hydraulic hitches for seeder




Spikes Roller



Spiral Roller



Cage Roller



Packer Roller

