

Maximum suggested horsepower

70 HP

	Total width
	Working width
	Side-shift
	Min. suggested horsepower
	Weight
	Hammer no.


VEGA/S						
	inches	inches	inches-inches	HP	pounds	Nr.
125	56"	49"	25 - 24 15 - 35	40	904	12
150	66"	59"	32 - 27 17 - 42	45	1003	14
175	76"	69"	32 - 37 17 - 52	50	1113	16
200	86"	79"	34 - 40 23 - 56	60	1224	18



www.celll-usa.com  
Toll Free: 1-877-591-4790

# VEGA/S

## SIDE-SHIFT MULTI-PURPOSE MULCHER

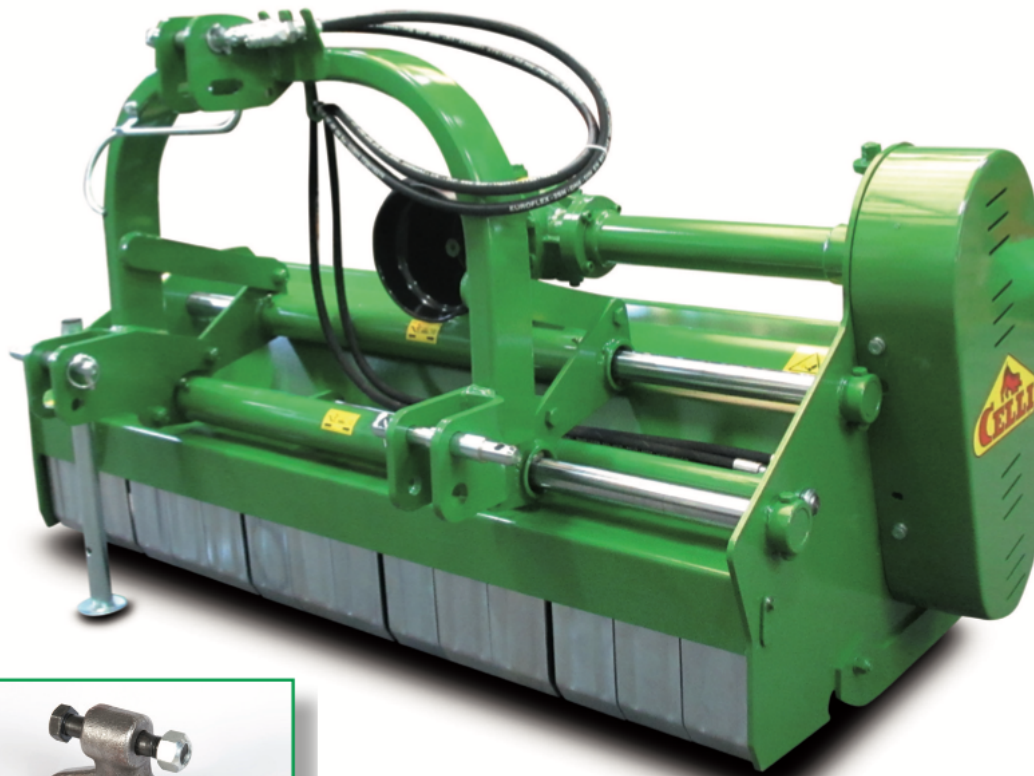

### SIDE-SHIFT MULTI-PURPOSE MULCHER

Suitable for grass, greens, set-aside (1½")

#### TECHNICAL SPECIFICATIONS

- Maximum horsepower: 70HP
- Rotor speed: 2278 rpm (for 540 rpm PTO) tip speed 156 ft/sec
- Side transmission with 3 belts (only model 125)
- Side Transmission with 4 belts (mod. 150-175-200)
- Side-shift mechanism by threaded bar onto 2 chromed plated rods
- fixed counter-blades (front and upper)
- Double 3 point hitch (2 working positions) adjustable in height for 6cm
- Rear roller 7"
- Gearbox with freewheel safety device
- Openable rear door for inspection
- Double shielded box frame
- Side protections
- Rotor (pipe 5½") with flat hammer (total 16")
- Drive shaft without safety device

#### OPTIONAL ACCESSORIES

- 3 Y shaped blades with straight blade
- Set of 2 rear rubber wheels
- Rear collection spike (min/max)  
125=5/9 pcs. 150=6/11 pcs.  
175=7/13 pcs. 200=8/15 pcs.
- Side-skids
- Side skids protections to minimize wear (set of 2)
- Hydraulic side-shift kit



Flat hammer (standard)



Y shaped blades with straight blade (optional)



Roller is separated from side-skids

Suitable for grass, greens, set-aside (1½" Diameter)