











Maximum suggested horsepower

50 HP


	Total width
	Working width
	Min. suggested horsepower
	Weight
	Hammer no.

SIRIO/F					
	in	in	HP	lbs	Nr.
105	46	41	30	496	8
120	52	47	30	573	10
135	58	53	35	650	12
150	64	59	35	728	12
165	70	65	40	805	14
180	76	71	40	882	16



www.celli-usa.com
Toll Free: 1-877-591-4790

SIRIO/F

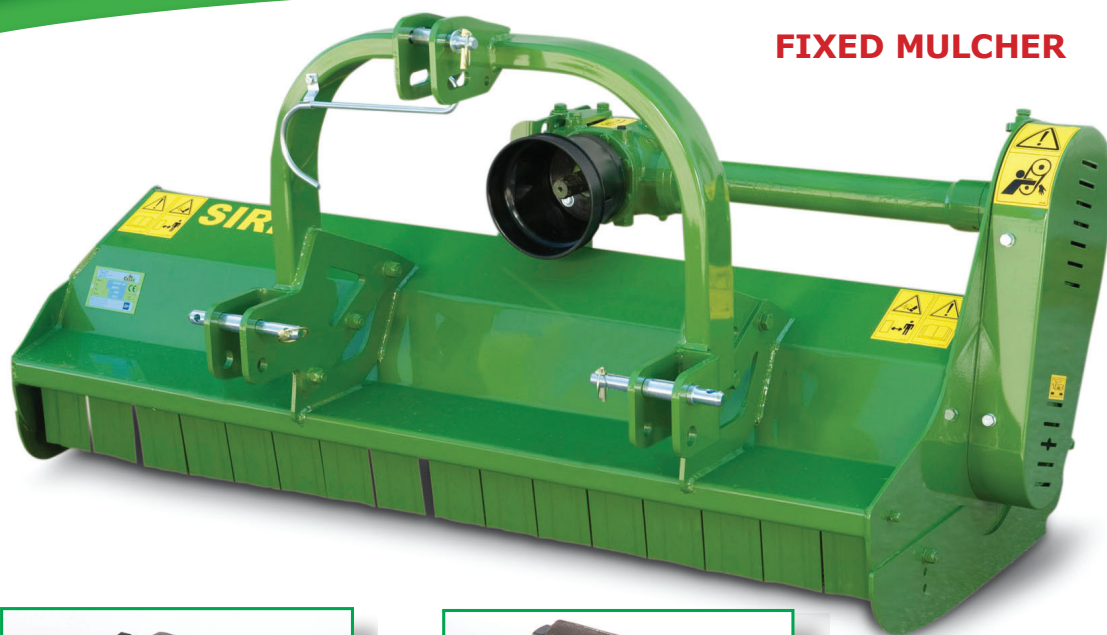

FIXED MULCHER

SIDE-SHIFT MULTI-PURPOSE MULCHER

Suitable for grass and pruning (0.8-1.2")

TECHNICAL SPECIFICATIONS

- Maximum horsepower: 50HP
- Rotor speed: 2454 rpm (for 540 rpm PTO) tip speed 141 ft/sec
- Side transmission with 3 belts
- Fixed counter-blades
- Rear roller (5") for cutting height adjustment
- Gearbox with freewheel safety device
- 3 point hitch (2 working positions) adjustable in height for 6cm
- Rotor (pipe 4") with toothed hammers (drawing 7) (total 13")
- Side protections
- Drive shaft without safety device

OPTIONAL ACCESSORIES

- L shaped blades
- Flat hammer
- Rear collection spike
- No. of spikes required: Model 105=7 120=8 135=9 150=10 165=11 180=12
- Side skids



Flat hammer (standard)



Toothed hammers (standard)



Y shaped blades with straight blade (optional)



Suitable for grass and small pruning (0.8-1.2")