



1100 GX
125-650

5" x 2133ft

Komet Twin 160 Ultra
190-380 GPM

FEATURES:

- Flow-distributor Hydraulic Turbine with built-in by-pass
- Hydraulic Turntable
- Double Drive System
- 4 Wheel Chassis
- Vacuum Pump
- 4-speed gearbox
- PTO for fast hose rewinding
- Unwind the hose with fully automatic operation
- Automatic speed compensator
- Self-balancing hydraulically controlled rear anchoring brackets, and hydraulic lift of trolley
- Adjustable trolley track and wheel height
- Komet Twin 160 Ultra sprinkler
- Hot-dip galvanized structure
- Water inlet on both sides



Comes Equipped with
Nortoft Program Rain
Computer System

DOWNLOADS:
[Operation Manual](#)
[Parts Breakdown](#)

WaterTec

www.watertecna.com



1-877-591-4790



1-888-695-7999




1100 GX

125-650

5" x 2133ft

Komet Twin 160 Ultra
190-380 GPM

Lbs
15,763

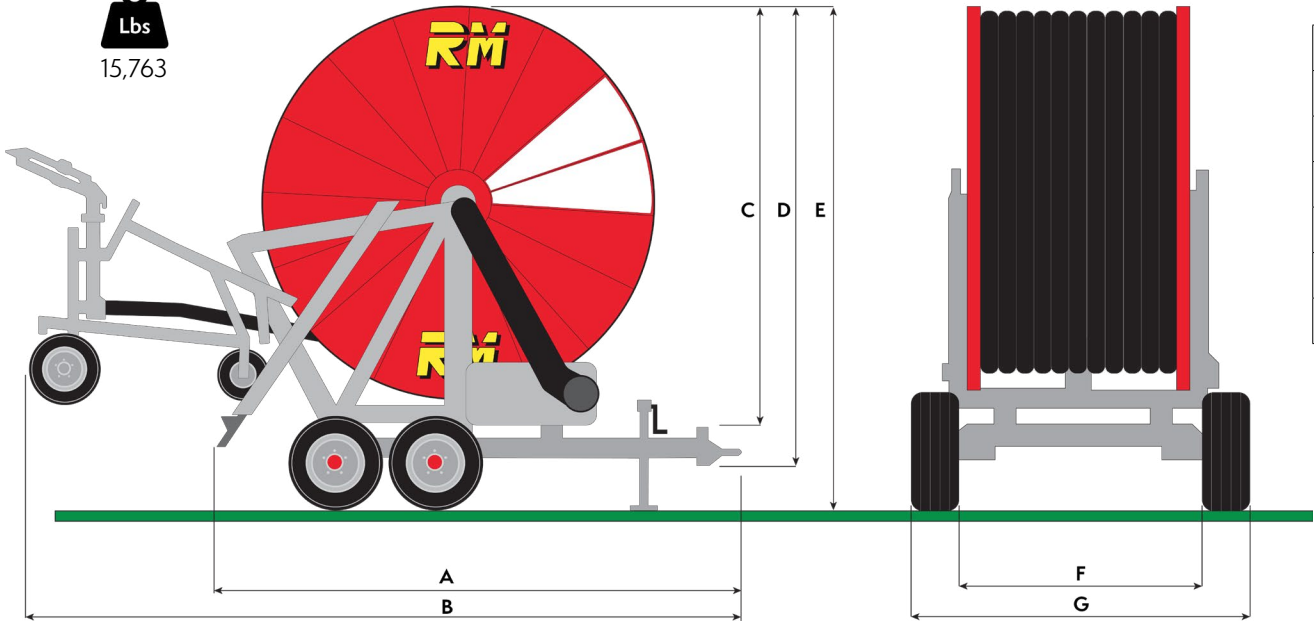

A	14.4'
B	23.6'
C	12.5'
D	13.3'
E	15.2'
F	7.2'
G	9.2'

Nozzle Size	Inlet	Sprinkler	Flow	Radius	Diameter	Spacing (85%)	Speed (feet/hour)												
							16	33	49	66	82	98	131	164	197	230	262	295	328
							Rewind Time (hours)												
mm/in	PSI	PSI	GPM	Feet	Feet	Feet	100	50	33.3	25	20	16.7	12.5	10	8.3	7.1	6.3	5.6	5
26 1.02"	87	59	223	151	302	257	5.11	2.56	1.70	1.28	1.02	0.85	0.64	0.51	0.43	0.37	0.32	0.28	0.26
	106	74	250	167	335	284	5.15	2.58	1.72	1.29	1.03	0.86	0.65	0.52	0.43	0.37	0.32	0.29	0.26
	128	88	285	171	341	290	5.77	2.89	1.93	1.44	1.15	0.96	0.72	0.58	0.48	0.41	0.36	0.32	0.29
28 1.10"	94	59	259	157	315	268	5.68	2.84	1.89	1.42	1.14	0.94	0.71	0.57	0.47	0.41	0.35	0.31	0.28
	115	74	289	171	341	290	5.86	2.93	0.77	1.46	1.17	0.98	0.73	0.59	0.49	0.42	0.37	0.33	0.29
	135	88	317	180	361	307	6.07	3.04	2.02	1.52	1.22	1.01	0.76	0.61	0.51	0.43	0.38	0.34	0.30
30 1.18"	101	59	298	164	328	279	6.26	3.13	2.09	1.57	1.25	1.04	0.78	0.63	0.52	0.45	0.39	0.35	0.31
	123	74	333	167	354	301	6.48	3.24	2.16	1.62	1.30	1.08	0.81	0.65	0.54	0.46	0.41	0.36	0.32
	150	88	380	190	381	324	6.90	3.45	2.30	1.72	1.38	1.15	0.86	0.69	0.57	0.49	0.43	0.38	0.35
32 1.26"	110	59	338	171	341	290	6.85	3.43	2.28	1.71	1.37	1.14	0.86	0.69	0.57	0.49	0.43	0.38	0.34
	135	74	378	184	367	312	7.11	3.56	2.37	1.78	1.42	1.19	0.89	0.71	0.59	0.51	0.44	0.39	0.35
	160	88	414	194	387	329	7.39	3.70	2.46	1.85	1.48	1.23	0.93	0.74	0.62	0.53	0.46	0.41	0.37

